

The Shield™ Splash Guard Installation / Replacement & Relocation

Instructions

Item	Part #	Description (Quantity)
1	340407	Shield
2	N/A	Thumb Screw 5/16-18 (2)
3	N/A	Metal Washer 5/16" (2)
4	N/A	Rubber Washer (4)
5	350257	Rubber Mount (2)
6	N/A	Metal Bracket w/adhesive
7	N/A	IPA Prep Pad
8	N/A	Primer Applicator
	600039	Hardware Kit (Items 2, 3, 4, 5)
	600053	Bracket Replacement/Relocation Kit (Items 2, 3, 4, 5, 6, 7, 8)

Failure to follow these directions **PRECISELY** will result in mounting failure. Contact Apollo Technical Support if assistance is required.

1. Disassemble Existing Shield (if not applicable, proceed to Step 2)


- 1.1. Remove and discard existing bolts/thumb screws (#2), metal washers (#3), rubber washers (#4) and Base (if applicable) from the Shield (#1).
- 1.2. Remove Shield and store away for later use.

2. Prepare Sink Surface for Bonding Bracket

- 2.1. All components and sink surface **MUST** be allowed to acclimate to room temperature (65 - 80°F) before installation.
- 2.2. Clean mounting area of sink rim surface **THOROUGHLY** with an appropriate cleaner and scouring pad. Remove all discoloring and residue. Rinse **THOROUGHLY** and allow to **DRY COMPLETELY**.
- 2.3. Use the isopropyl alcohol (IPA) prep pad (#7) or a 50:50 mixture of isopropyl alcohol (IPA) and water, to remove any remaining soap and residue from mounting area. Allow area to **DRY COMPLETELY**.
- 2.4. Apply 3M primer 94 (#8) to top of sink rim where bracket will be attached. Crush dot on ampule and use applicator tip to apply a thin and uniform coat across area where bracket will be installed. Allow primer to **DRY COMPLETELY** (about 10 minutes).

3. Bond Metal Bracket to Sink Rim

- 3.1. Carefully remove protective film from metal bracket (#6). **DO NOT TOUCH** adhesive strip.
- 3.2. Install metal bracket (#6) on sink rim centered left to right. **WIDE RIM SINKS ONLY**: Install metal bracket (#6) 1.25 in (3.175 cm) from inside edge. Refer to diagram.
- 3.3. **APPLY EVEN PRESSURE** over all of metal bracket (#6) to achieve a good overall bond. Allow adhesive to cure for a **MINIMUM OF 8 HOURS** before proceeding.

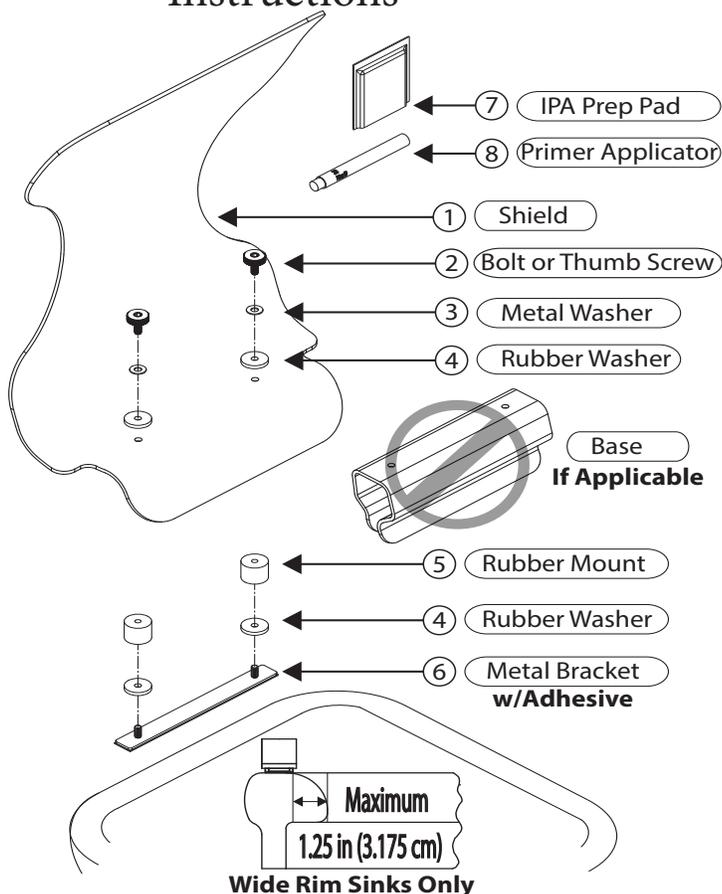

4. Assemble Metal Bracket

- 4.1. Install rubber washers (#4) onto threaded studs of metal bracket (#6).
- 4.2. Thread rubber mount (#5) on each stud by hand until tight.

5. Assemble Thumb Screws

- 5.1. Install metal washer (#3) onto threaded stud of each thumb screw (#2).
- 5.2. Install rubber washer (#4) onto threaded stud of each thumb screw (#2).
- 5.3. Push the rubber washers (#4) all the way down stud, tight against knob.

6. Install Shield onto Metal Bracket

- 6.1. Place the shield (#1) onto rubber mounts (#5) of metal bracket (#6).
- 6.2. Thread each thumb screw (#2) thru the holes in the shield (#1) into each rubber mount (#5).
- 6.3. Secure thumb screws (#2) by hand until tight.

7. Train All Personnel on Use and Removal of Splash Guard


- 7.1. Remember to include janitorial staff on removal of the splash guard using thumb screws.
- 7.2. The Shield™ splash guard is designed to flex forward as the user bends toward the sink. However, bending it backwards (away from the inside of sink) will cause damage to the guard and/or the mounting adhesive. **This damage is not covered by warranty.**

The Shield™ Splash Guard Specifications

Apollo's Clinic Sink Splash Guard, The Shield™, is the most efficient and economical product on the market to protect your staff from exposure to splattering waste that harbors pathogens. When used as part of a PPE system for infectious waste handling, it provides an effective splash barrier over most of the body.

The Shield™ Splash Guard simply affixes to on the front edge of all makes of service sinks. New installation may be completed in minutes and it is readily removed for service as needed. It may be cleaned and disinfected in place. The splash guard flexes for staff comfort and is transparent for good visibility. The Shield is extremely sturdy and typically provides years of rigorous use..

Cleaning: Any non-abrasive disinfectant and/or cleaner. We recommend Apollo's Turbo Clean™ Pre-Disinfectant Detergent and Apollo's Cid-A-L™ II Quaternary Disinfectant. They are non-abrasive and will not scratch surfaces.

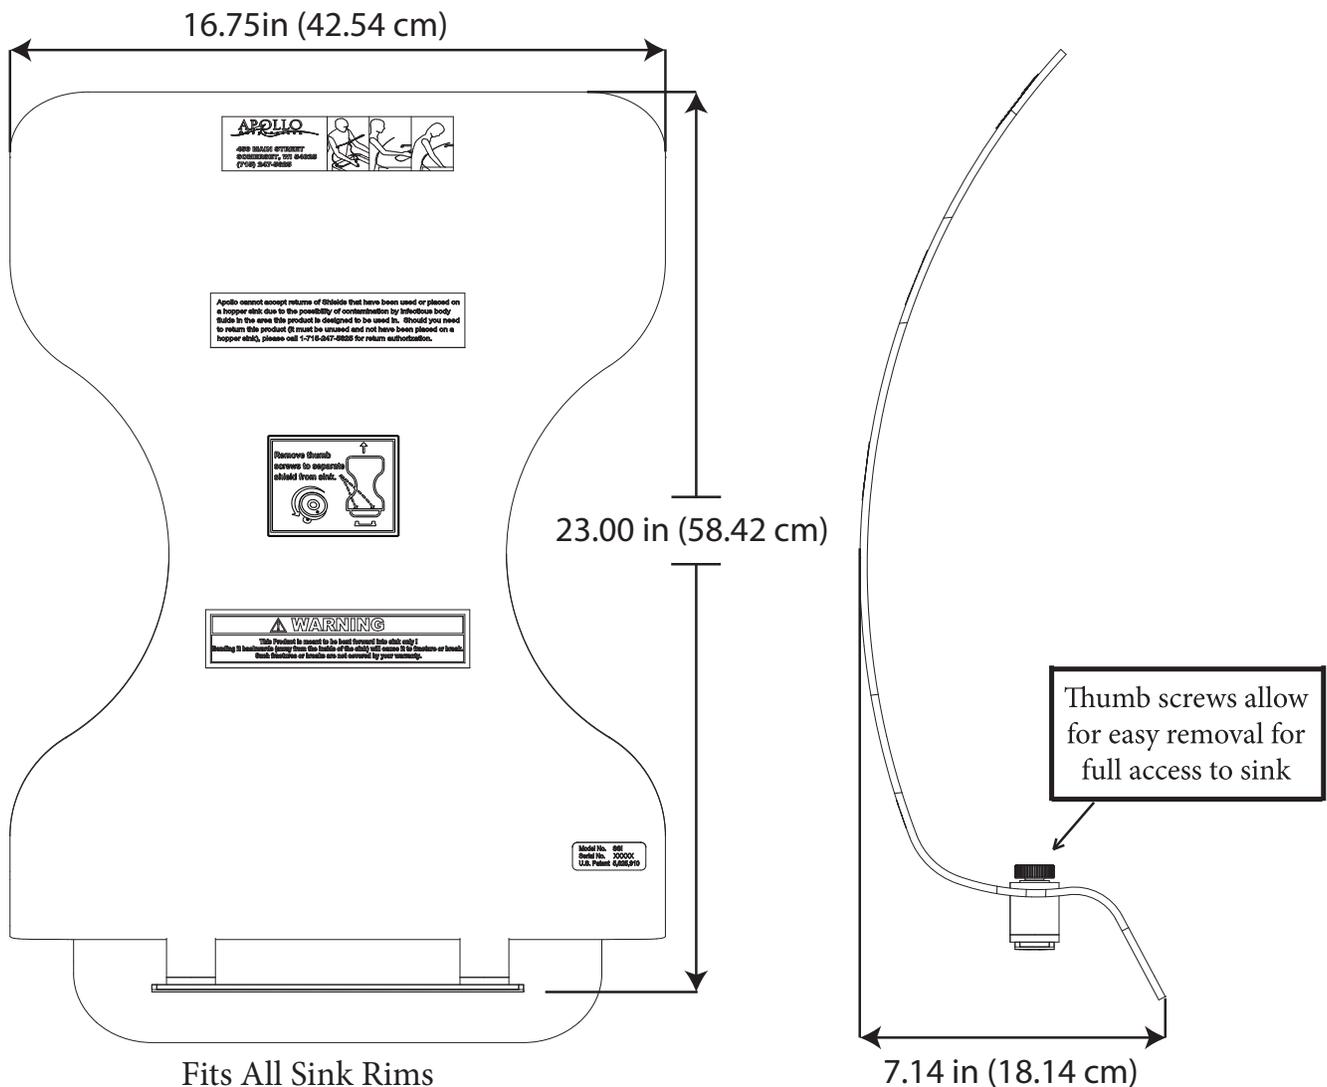

WARNING!

The Shield™ splash guard is designed to flex forward as the user bends toward the service sink. Bending it backwards (away from the inside of sink) will cause damage to the Shield™ splash guard and/or the mounting adhesive. This damage is not covered by warranty.